


HANDLE MARKING

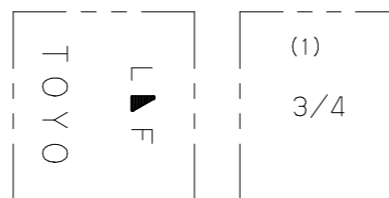

ONE SIDE THE OTHER SIDE

MARKING ON THE BODY

DIMENSIONS

UNIT: inch

NOMINAL SIZE	d	H	D1	L	L1	L2	d2	d3	s1
1/2	0.59	1.65	3.23	2.92	1.02	2.46	NPT 1/2	3/4-11.5NHR	1.10
3/4	0.79	2.01	3.94	3.29	1.18	2.82	NPT 3/4	3/4-11.5NHR	1.34

- NOTE (1) VALVE SIZE IDENTIFICATION.
 (2) KSB-4XA AND KSB-4XC ARE LEAD FREE BRASS.
 (3) SnNi PLATING.
 (4) ELECTROPLATED COATINGS OF ZINC AND PLASTIC COVERING.
 (5) END CONNECTION: ASME B1.20, 1/ASME B1.20, 7 3/4 11.5NHR.

NO	NAME OF PARTS	QTY	MATERIALS	SPECIFICATIONS
1	BODY	1	FORGED BRASS (KSB-4XA (2))	CDA No. C46750
2	BODY CAP	1	BRASS ROD (KSB-4XC (2))	CDA No. C46750 (SIZE 1/2)
		1	FORGED BRASS (KSB-4XA (2))	CDA No. C46750 (SIZE 3/4)
3	STEM	1	BRASS ROD (KSB-4XC (2))	CDA No. C46750
4	BALL	1	FORGED BRASS (3) (KSB-4XA (2))	CDA No. C46750
7	GLAND	1	BRASS ROD (B16)	
8	GLAND PACKING	1	PTFE	
9	HANDLE	1	CARBON STEEL (4)	
10	HANDLE NUT	1	CARBON STEEL	
16	SPRING WASHER	1	CARBON STEEL	
19	GASKET	1	NBR	
30	BALL SEAT	2	PTFE	
86	CAP & CHAIN	1	BRASS	

STANDARD	FACE TO FACE OR END TO END	TOYO STANDARD
	END CONNECTION	(5)
	WALL THICKNESS	TOYO STANDARD
	PRESSURE TEST	TOYO STANDARD
FIGURE		(RW02) AKTAFCN/NO. 5046LF

TYPE 600 LEAD FREE FORGED BRASS
BALL VALVES

FULL BORE.
SCREWED END x 3/4 HOSE CONNECTION WITH CAP AND CHAIN.

DATE APPD	JUN.20.'14	DRAWING NO	△		
APPD BY	T. KOYANAGI	825-001919	△		
CHKD BY	K. NAKAI		△		
DSGND BY	N. KAMA		△		
DRAWD BY	Y. WATANABE		△		
		REV-00	MARK	DATE	BY



TOYO VALVE CO., LTD.

TOYO