700 SERIES

- Size range: 2" to 12"
 Consult factory for larger sizes
- Temperature range (-)60°F to +250°F Consult factory for higher temperatures
- Conforms to all applicable standards API 609, DIN 3202,ISO 5752, BS EN593 and FDA 21CFR177.2600
- ANSI B16.5 CLASS 150 Flange drilling
 Other drillings available

Resilient Seated - Composite Body






700 SERIES

Features

Resilient Seated - Composite Body

Strong Light Weight Zero Corrosion

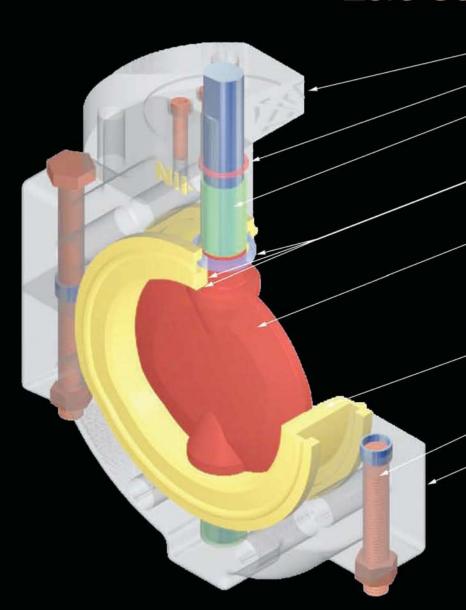

ISO 5211 mounting flange

Atmospheric stem seal

PTFE composite bearing top & bottom never needs lubrication

Energized Triple stem seals top & bottom for leak free service

Disc & stem are one piece casting available in stainless steel or food grade EPDM or Hypalon encapsulated nickel plated DCI with double "D" shaft drive.
Other disc materials available

Seat is thick food grade EPDM meeting FDA 21CFR177.2600 or Hypalon elastomer locked into valve body

Zinc Dichromate plated B7 fasteners

Valve body is manufactured from advanced fiber reinforced vinyl ester resin that is as strong as steel, 1/2 the weight of ductile iron and will never corrode. Guaranteed!

Body configurations include flange wafer or lug style



4855 Broadmoor Ave. Kentwood, MI 49512 (616)-554-3100 - Fax (616) 554-5623 www.nilcor.com