

FLO-VU[®]

Sight Flow Indicators

**Guaranteed Not To Leak*




**High Pressure & Temperature Rated
Excellent Safety & Reliability**

ETHYLENE[™]
an ANDRONACO INDUSTRIES company

FLO-VU®

***Guaranteed Bubble-Tight**

**When used within Ethylene design conditions*

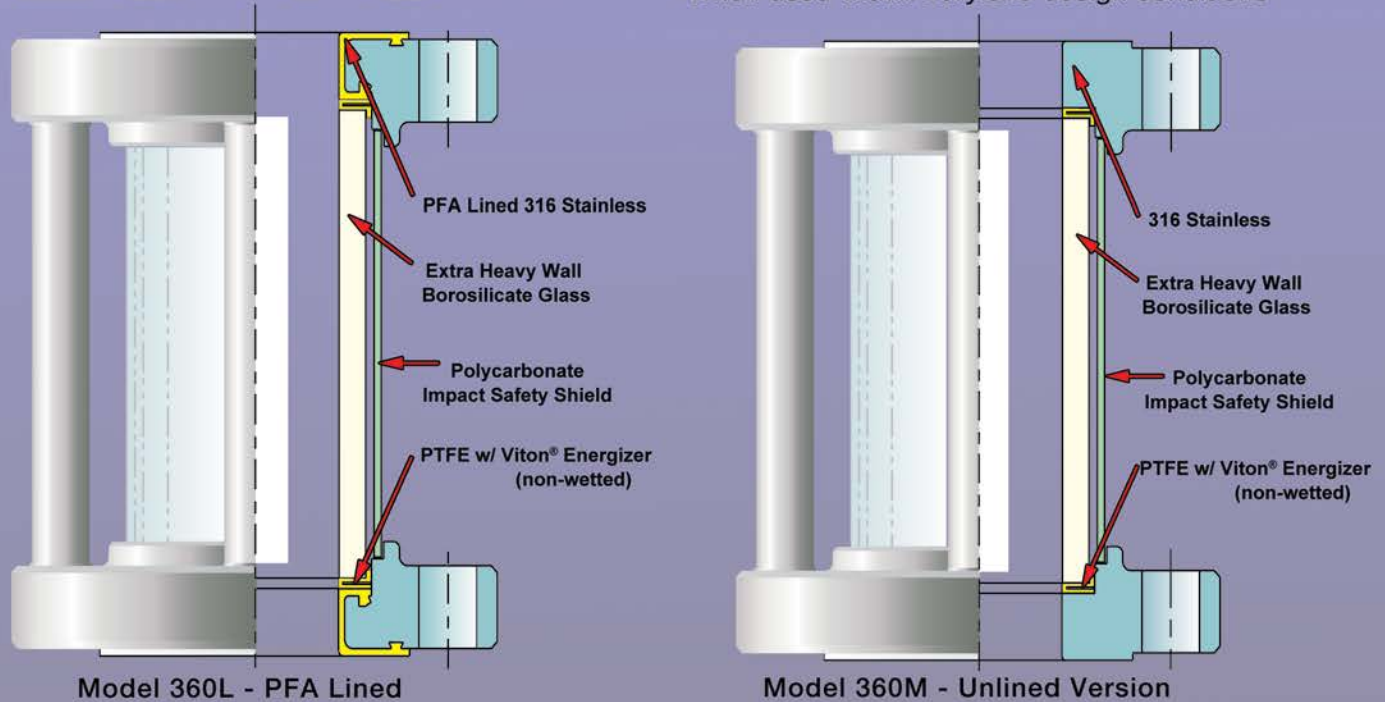

Standard Features

- **Size Range**
1" - 12" up to 50" Long
- **Pressure Rating**
Full Vacuum to 150 psig
- **Operating Temperature**
(-)20°F to (+)350°F
- **100% Tested**
Each unit is subjected to a 225 psig hydrostatic pressure test and a 100 psig helium mass spectrometry test before shipment
- **Energized Seal Design**
PTFE / Viton® Energizer gasket provides a secure, bubble-tight seat even in applications with extreme thermal cycling
- **Lexan®/ Polycarbonate Impact Shield**
A Lexan outer safety shield with an unobstructed 360° view is provided on FLO-VU 360L and 360M to protect the glass from external damage and to provide scatter protection
- **PFA and Glass Wetted Surfaces**
PFA and borosilicate glass wetted surfaces offer high temperature with maximum corrosion resistance and absolute product purity
- **Rugged Construction**
All FLO-VU sight indicators have heavy-duty tie rods and flanges to limit deformation under heavy external loads and reduce glass stress

FLO-VU® Standard
PFA Lined or Unlined 316 S.S.



FLO-VU® Durcor® Composite Flanges



FLO-VU® Double-Sure™ Double Contained



FLO-VU® Pure-Vu™ Sanitary Tri-Clamp



4855 Broadmoor Ave. - Kentwood, MI 49512 Ph (616)554-0900 FAX (616)554-3464
www.ethylene.com

0112-101917