


AWWA C228-14 Stainless-Steel Ring Flanges

Class SF

Sf flanges are 300 PSI

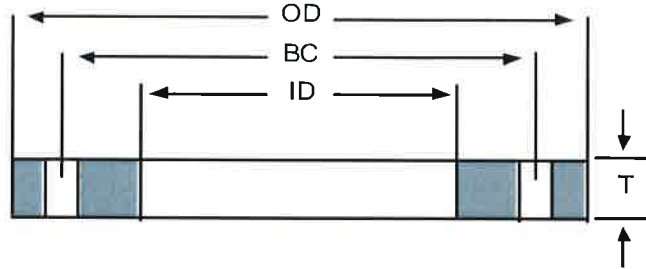

Nominal Size	Outside Diameter (OD)	ID of Flange (B)		No. of Bolt Holes	Bolt Circle (BC)	Diameter of Holes	Thickness (T)
		Pipe	Tube				
4	10.00	4.57	4.03	8	7.88	0.875	1.13
5	11.00	5.66	5.03	8	9.25	0.875	1.21
6	12.50	6.72	6.03	12	10.62	0.875	1.31
8	15.00	8.72	8.03	12	13.00	1.00	1.31
10	17.50	10.88	10.03	16	15.25	1.125	1.50
12	20.50	12.88	12.06	16	17.75	1.25	1.63
14	23.00	14.19	-	20	20.25	1.25	1.94
16	25.50	16.19	-	20	22.50	1.375	2.14
18	28.00	18.19	-	24	24.75	1.375	2.25
20	30.50	20.19	-	24	27.00	1.375	2.33
22	33.00	22.19	-	24	29.25	1.375	2.50
24	36.00	24.19	-	24	32.00	1.625	2.69
26	38.25	26.25	-	28	34.50	1.875	3.00
28	40.75	28.25	-	28	37.00	1.875	3.13
30	43.00	30.25	-	28	39.25	1.875	3.15
32	45.25	32.25	-	28	41.50	1.875	3.25
34	47.50	34.25	-	28	43.50	1.875	3.38
36	50.00	36.25	-	32	46.00	2.125	3.46
38	52.25	38.25	-	32	48.00	2.125	3.50
40	54.25	40.25	-	36	50.25	2.125	3.63
42	57.00	42.25	-	36	52.75	2.125	3.81
44	59.25	44.25	-	36	55.00	2.125	4.00
46	61.50	46.25	-	40	57.25	2.125	4.13
48	65.00	48.25	-	40	60.75	2.125	4.50

DIMENSIONS ARE IN INCHES

The purchaser shall specify the ID of the flange if other than standard as shown in table.

WESTLUND/EMCO Water Solutions is the leader in providing “inside the fence supply solutions” to the In-Plant water and wastewater market *nationally*. We offer the largest scope of construction material of any supplier; nurturing and sustaining successful partnerships and value-add opportunities throughout the construction process. Our pledge is to establish lasting relationships with our customers by exceeding their expectations and gaining their trust through exceptional performance by every member of our team